Titanium Travertine FBX

CLASSIFICATION	FBX
TEXTURE	A light textured finish with a natural clay grain appearance.

Choose clay face bricks for their unmatched durability, timeless beauty, and excellent thermal insulation, all while requiring no maintenance, ensuring your building stands the test of time with minimal effort.

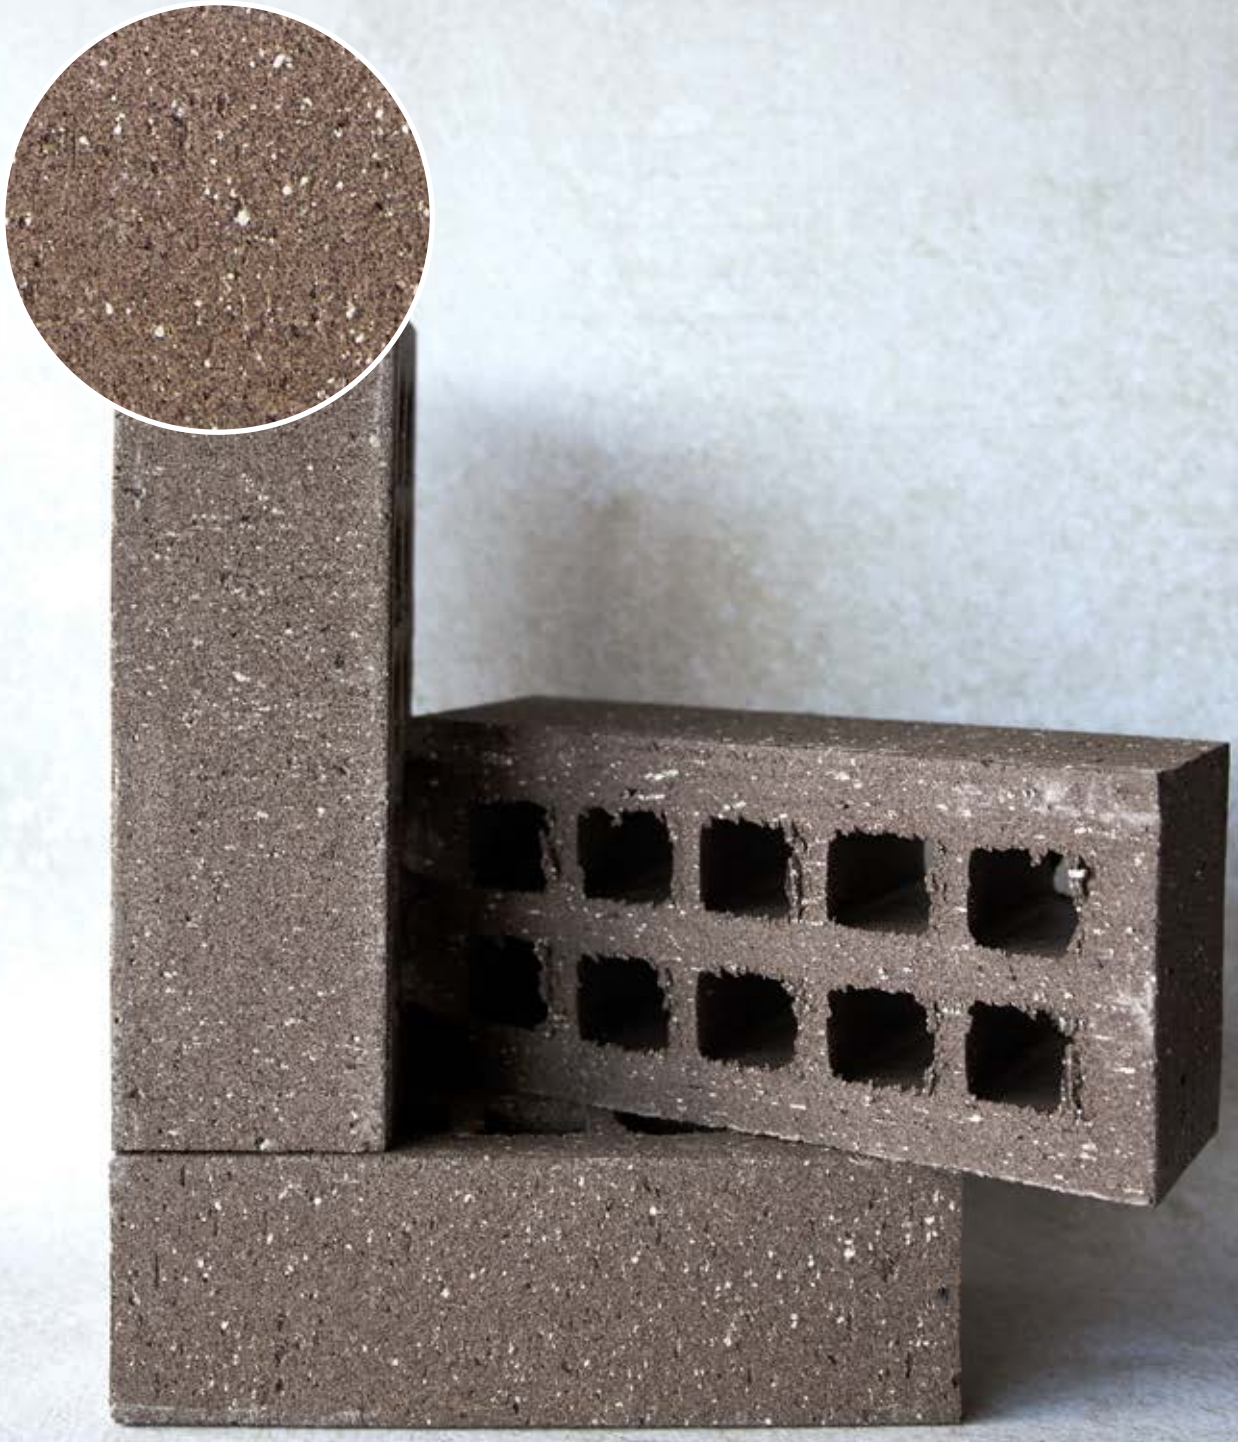

Variations in colour, texture, and size are natural characteristics of clay products and production variations can occur from batch to batch. Whilst every effort is made to provide brochures consistent with products delivered to site, they should be viewed as a guide only.

Titanium Travertine FBX

SPECIFICATIONS

Size (length x width x height)	222 x 106 x 73mm	**Classification**	FBX
SANS	227:2007	**ISO**	9001:2015
Typical Compressive Strength	>32 MPa	**Typical 24^{hr} Water Absorbtion**	>7%
Moisture Expansion Category	I	**Efflorescence Rating**	Nil
Expoure Zone Suitability	1-4	**Bricks per m²** (excluding cutting & waste)	51
Factory Manufactured At	Midrand, Gauteng	**Bricks per pallet**	480
Average mass per brick	2.3kg	**Available in Special Shaped Bricks**	Yes

www.corobrik.co.za

Download the high-resolution swatches, BIM files and view more project photos | www.corobrik.co.za

Variations in colour, texture, and size are natural characteristics of clay products and production variations can occur from batch to batch. Whilst every effort is made to provide brochures consistent with products delivered to site, they should be viewed as a guide only.

For image and project credits, please visit: www.corobrik.co.za/featured-projects

Information correct as at 28/06/2024